


TS750-S


Slant Back Vent

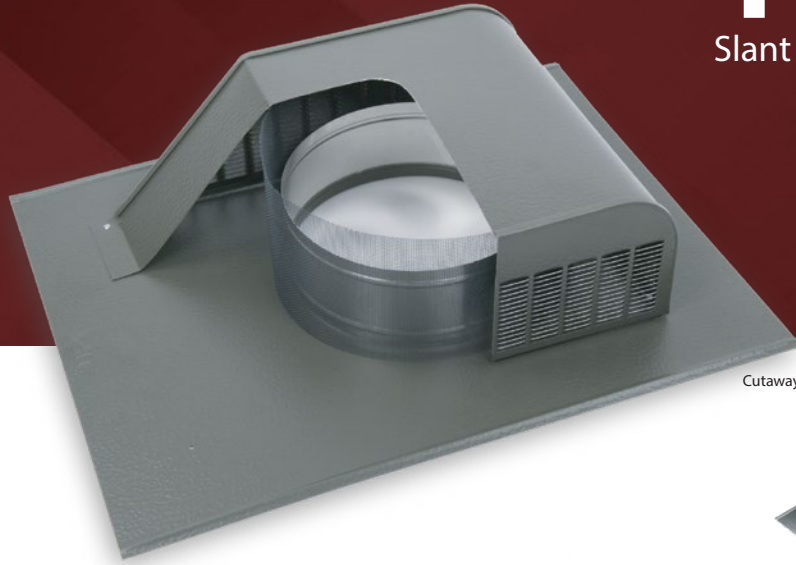


ENHANCED WEATHER PROTECTION

Cutaway View

Net Free Area Verified




Mill Finish




Brown




White



Black



Weathered Bronze



Forest Green

TS750-S FEATURES

- Aluminum screen attached for enhanced protection
- Available in Aluminum, TS750-S, and Galvanized, TS750-GS
- Greater air flow with three louvered sides
- Fits all hip, pitched or gable roofs
- Weathertight sealed collar
- High profile for increased weather protection and circulation
- Prevents roof discoloration
- Bird-proof
- TS750-S has embossed painted finish for added strength, extended paint life, durability, and blending appearance with shingles

Model	Overall Size (in.)	Opening Size (in.)	NFA (in. ²)
TS750-S*	16 x 20 ⁵ / ₁₆ x 5	8	50
TS750-GS	16 x 20 ⁵ / ₁₆ x 5	8	50

YOUR ATTIC FLOOR SPACE TO BE VENTILATED IN SQUARE FEET						
	1000	1500	2000	2500	3000	3500
ROOF VENT SYSTEM – EXHAUST						
TS750-S	5	8	10	12	15	17
TS750-GS	5	8	10	12	15	17
ROOF VENT SYSTEM – INTAKE						
TSDA-4	7	12	14	17	21	24



TS700 Series Roof Louvers are built with three outward and upward discharging side vents to prevent unsightly roof streaking that is so common with ordinary roof louvers. This exclusive design also prevents the problem of bird and animal infiltration while providing

Scan the QR code to access additional information

