


W20 Synthetic Underlayment

CraftGrade™ W20 is synthetic roof-deck underlayment designed and manufactured to replace asphalt saturated felt in sloped roof system construction. Provides an affordable secondary water-shedding barrier for your shingle roof system.

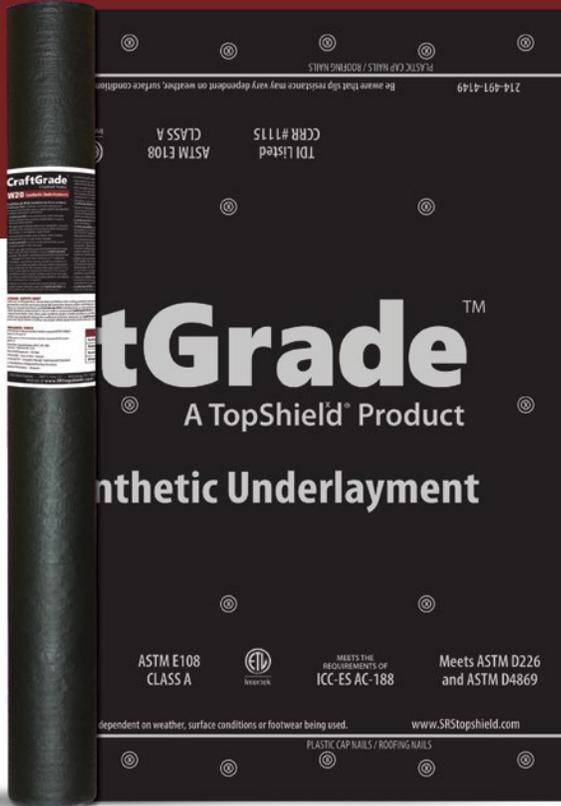

FEATURES

- ▶ 100% synthetic construction offers long term moisture protection - doesn't absorb water and is inert to mold growth.
- ▶ Rolls out flat and does not wrinkle, eliminating customer callbacks.
- ▶ 33% more coverage per pass across the roof (vs 36" wide rolls).
- ▶ Synthetic construction resists tearing during roof installation - UV stabilized to resist UV degradation up to 60 days.
- ▶ Designed to perform under extreme weather conditions.

SPECIFICATIONS

For Use On

Used beneath fiberglass and asphalt shingles, shakes, stone coated steel roofing shingles and synthetic slate.

PHYSICAL DATA	
Roll Size	48" X 250'
Material Per Roll	1000 sq. ft.
Weight Per Roll	19 lbs
Rolls Per Pallet	64 rolls
Wt Per Pallet	1,266 lbs
Limited Warranty	20 Years

DESCRIPTION	ITEM CODE
CraftGrade™ W20 Synthetic Underlayment (Black)	TOP1SGWWTSCGW20B
CraftGrade™ W20 Synthetic Underlayment (Gray)	TOP1SGWWTSCGW20G

APPLICABLE STANDARDS & APPROVALS

- ▶ ASTM D226 –Type I, II
- ▶ ICC AC-188
- ▶ FBC #FL42148
- ▶ CCRR 1115
- ▶ ASTM E108 – Class A Fire
- ▶ ASTM D6757 – Inorganic Shingle Underlayment Standard
- ▶ UL Classified



Scan QR Code
for additional
information.