

# #15 TRUEHD

## Roofing Fasteners



### PRODUCT DATA SHEET


#### PRODUCT DESCRIPTION:

#15 TRUEHD Fastener is engineered for lap attachment to corrugated steel (18–22 ga.) and wood substrates in higher wind uplift roof assemblies. Featuring a #2 double flute self-drilling point and exclusive tapered entry thread design, they penetrate steel quickly and offer exceptional back-out resistance.

#### COMPATIBLE ACCESSORIES:

Use with 2" Metal Seam Plates or 3" Metal Insulation Plates

#### PRODUCT SPECIFICATION:

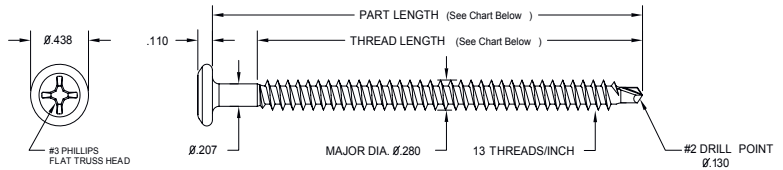

PART NUMBER	PART LENGTH	THREAD LENGTH	PACKAGE QTY	PACKAGE WEIGHT
TRUEHD2000TS	2"	2"	1000/Bucket	19.5 lbs.
TRUEHD3000TS	3"	3"	1000/Bucket	28.2 lbs.
TRUEHD4000TS	4"	4"	1000/Bucket	37.8 lbs.
TRUEHD5000TS	5"	4"	1000/Bucket	48.1 lbs.
TRUEHD6000TS	6"	4"	500/Bucket	27.9 lbs.
TRUEHD7000TS	7"	4"	500/Bucket	33.6 lbs.
TRUEHD8000TS	8"	4"	500/Bucket	37.3 lbs.
TRUEHD9000TS	9"	4"	250/Bucket	20.7 lbs.
TRUEHD10000TS	10"	4"	250/Bucket	23.7 lbs.
TRUEHD11000TS	11"	4"	250/Bucket	25.3 lbs.
TRUEHD12000TS	12"	4"	250/Bucket	28.9 lbs.
TRUEHD14000TS	14"	4"	250/Bucket	33.1 lbs.
TRUEHD16000TS	16"	4"	250/Bucket	36.9 lbs.
TRUEHD18000TS	18"	4"	250/Bucket	41.7 lbs.
TRUEHD20000TS	20"	4"	250/Bucket	46.7 lbs.
TRUEHD22000TS	22"	4"	250/Bucket	51.1 lbs.
TRUEHD24000TS	24"	4"	250/Bucket	56.1 lbs.

#### CODE APPROVALS & LISTINGS:

- FM Global
- Miami-Dade County
- State of Florida



PERFORMANCE DATA		
PROPERTY	STANDARD	AVERAGE ULTIMATE VALUE
<b>Tensile Strength:</b>	ASTM F606-10	4200 lbf.
<b>Shear Strength:</b>	NASM 1312-20	2400 lbf. (thread zone)
<b>Corrosion Strength:</b>	FM 4470, DIN 50018	< 15% Red Rust after 30 cycles

Scan the QR code to access additional information

